

PVAc 21.47 adhesive

PRODUCT DESCRIPTION

PVAc 21.47 is suitable for block, edge and assembly bonding. Can be also used for bonding of hard wood species. Adhesive weld meets the requirements of D2 water resistance class according to PN-EN 204 standard.

TECHNICAL DETAILS

Type:	PVAc-based dispersion
Delivery form:	Liquid
Colour:	White
Viscosity:	11000-17000 mPa.s (Brookfield RVT, ISO 2555)
pH:	4


ADHESIVE APPLICATION

Material preparation

Bonded surface must be cleaned and dust-free, free of oil and grease, which may reduce adhesion. Wood moisture content should be 8 ÷ 12.

Applying of adhesive

It is recommended to precisely mix the adhesive before use. Adhesive can be applied on one or both sides with a spatula, brush, manual or roller applicator. Depend from the type of surface, recommended amount of applied adhesive is 100-200 g / m².

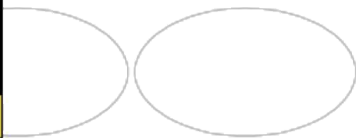

Wood discoloration

Adhesive does not cause the discolouration of wood, however when working with adhesive it is recommended to avoid tools containing iron, which in contact with wood containing tannin - can cause discoloration.

Bonding temperature

Use in temperature above +15°C. This applies to the ambient temperature and, above all, the temperature of the bonded materials and the adhesive itself.

Assembly time (pine-pine)

Open assembly time (OAT) is max. 5 minutes at 20°C, closed assembly time is max. 8 min.

Pressing time

For bonding of pine slats, minimum pressing time is 30 min. at 20°C.

The pressing time depends from the same factors as the assembly time. Bonding other than pine wood species, bonding in different temperatures or bonding the structures with the existing tensions require of determine the pressing time for each case separately.

Press pressure

0.3-1 Mpa. Thoroughly polished surfaces with good adhesion give the best bonding results.

Cleaning

Wash tools immediately after work. Do not allow the adhesive to dry. Dried adhesive remove mechanically after soaking in hot water (about 1 h).

PACKAGING

PVAc 21.47 is available in following packages:

5 kg, 10 kg, 20 kg, 1100 kg

STORAGE AND EXPIRY DATE

Product should be stored in original, closed packaging in temperatures between +15 to +25°C. After opening the package, take required amount of adhesive and close the container tightly. Product stored under these conditions, retains its properties within 12 months of the manufacture date.

HAZARD INFORMATION

For complete health and safety information please refer to the Material Safety Data Sheet.

Above information's are the result of our practical experience and have indicative character, they are not guarantee of product properties and cannot be the underline for complaint. For this reason use of adhesive under conditions other than those specified in this sheet does not guarantee obtaining optimum results. Manufacturer is not liable for any damages resulting from non-compliant use.

CDW Sp. z o.o.

ul. Wrzesińska 21, 62-307 Borzykowo, Polska

Tel. 61 640 05 15, Fax. 61 640 18 98

www.cdw.net.pl SKL@cdw.net.pl

NIP PL 789-161-28-42